


Product Code

6110N/X21

Receiver Valve with Cap

1/4"Flare female x1/4"Flare
PS = 50 bar - 725 psi

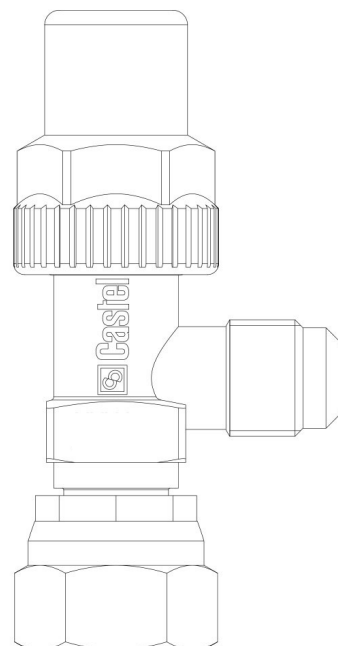

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product Details

Access fitting SAE Flare 1/4" f (1)

Connections SAE Flare 1/4"

Connections NPT -

Kv [m³/h] 0,44

PS [bar] 50

MWP [psi] (2) 725

TS [°C] min. -40

TS [°C] max. +150

Package pcs 90

Notes where expressly stated

(1): can be used without copper gasket

(2): according to UL approval