


Product Code

6690NB/M28

3 Ways To Be Motorized Ball Valve
28mm ODS
PS = 50 bar - 725 psi

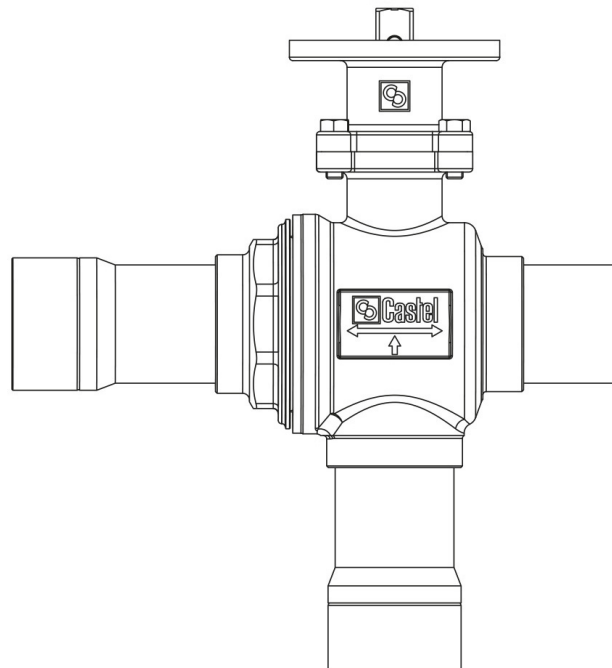

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product Details

Part number (1) 6690NB/M28

Part number (1)

Connections ODS Ø [in.] ?

Connections ODS Ø [mm] 28

Ball port Ø [mm] 24

Kv [m³/h] 15,9

PS [bar] 50

MWP [psi] (2) 725

TS [°C] min -40

TS [°C] max +150

Package pcs 1

Notes where expressly stated

- (1): with adapter for servomotors with ISO mounting flange
- (2): according to UL approval
- (3): UL approval ongoing