




Product Code

9150C/R65

Orifice Assemblies

00x2028
PS = 90 bar - 1305 psi

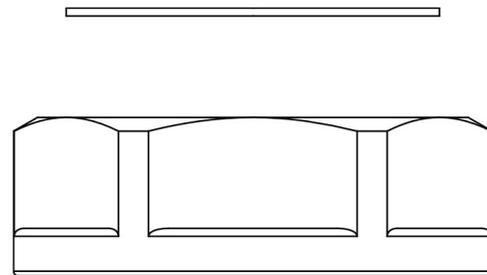

Product use

Solenoid expansion valves with the 'EX' suffix are compliant with the ESR of Directive 2014/34/EU 'ATEX'. This equipment is suitable for use on refrigeration systems located in areas classified as 'Zone 2' risk of explosion, according to the definition in Annex I of Directive 1999/92/EC.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A,

R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

These valves are only sold in the model with the ATEX certified coil (A6 suffix), with 9 nozzles assembled for an increasing output from 2 to 36 kW with R290.

Product Details

Orifice type	03
Rated capacity (1) [kW] R134a	1,86
Rated capacity (1) [kW] R32	4,13
R404A	1,74
R507	1,74
R407C	2,42
R410A	2,84
R1234ze	1,46
R1234yf	1,37
R448A	2,32

R449A	2,27
R450A	1,63
R452A	1,80
R452B	3,21
R454A	2,35
R454B	3,24
R454C	2,00
R513A	1,58
R515A	1,41
R515B	1,40
R290	2,51
R600	1,59
R600a	1,64
R1270	2,80
Package pcs.	180

Notes where expressly stated

(1) Rated capacities are based on:

- Evaporating temperature $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Condensing temperature $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Refrigerant liquid temperature ahead of valve $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$