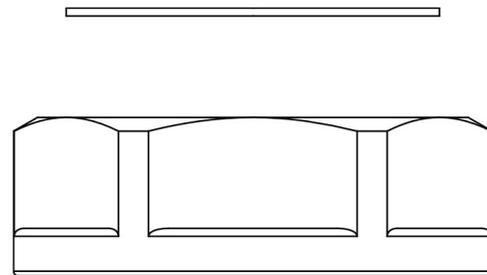## Product Code

9150C/R68

Orifice Assemblies
00x2028
PS = 90 bar - 1305 psi

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:
HCFC (R22)
HFC (R134a, R404A, R407C, R410A, R507)
HFO (R1234ze)
HFO + HFC (R448A, R449A, R450A, R452A, R513A,
R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product Details

Orifice type	06
Rated capacity (1) [kW] R134a	7,14
Rated capacity (1) [kW] R22	9,10
R23	13,5
R404A	6,66
R507	6,66
R407C	9,30
R410A	10,92
R1234ze	5,61
R448A	8,90
R449A	4,73
R450A	6,27

R452A	6,90
R513A	6,06
R515A	5,39
R515B	5,37
Package pcs.	180

Notes where expressly stated

(1) Rated capacities are based on:
- Evaporating temperature T_{evap} = + 5 °C
- Condensing temperature T_{cond} = + 32 °C
- Refrigerant liquid temperature ahead of valve T_{liq} = + 28 °C

Rated capacities in R23 are based on:
- Evaporating temperature T_{evap} = - 30 °C
- Condensing temperature T_{cond}= - 4 °C
- Refrigerant liquid temperature ahead of valve T_{liq} = - 8 °C