


Product Code

5650/RA2

Electronic Oil Level Regulator
24 VAC - 50/60 Hz
PS = 50 bar

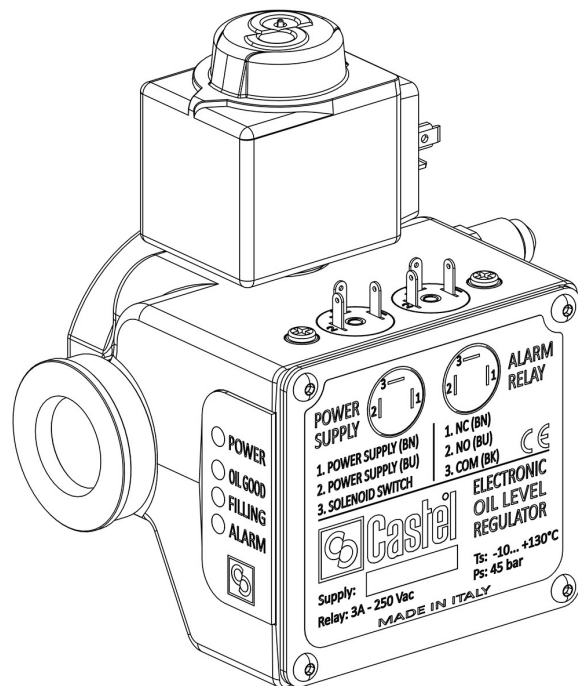

Product use

The oil level regulators ensure monitoring and control of the oil level in the crankcases of both alternative reciprocating and scroll compressors. Specifically, these regulators are employed to resolve the problem of incorrect oil distribution in multiple compressor plants.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product Details

Connections Compressor crank 5690/X115690/X125690/X135690/X145690/X155690/X17

Connections Oil level inspector 1 sight glass

Oil inlet SAE FLARE 3/8"

Version Right

Voltage [V] 24 AC

Frequency [Hz] 50/60

Degree of protection IP 65

Cables kit (1) 9901/X26

PS [bar] 50

TS [°C] min. -30

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

TS [°C] max.	+130
--------------	------

Package pcs	4
-------------	---

Notes where expressly stated

(1) To be ordered separately