


## Product Code

# 1328N/3S020

Pulse Solenoid Valve  
3/8"ODS w/o Coil  
PS = 50 bar

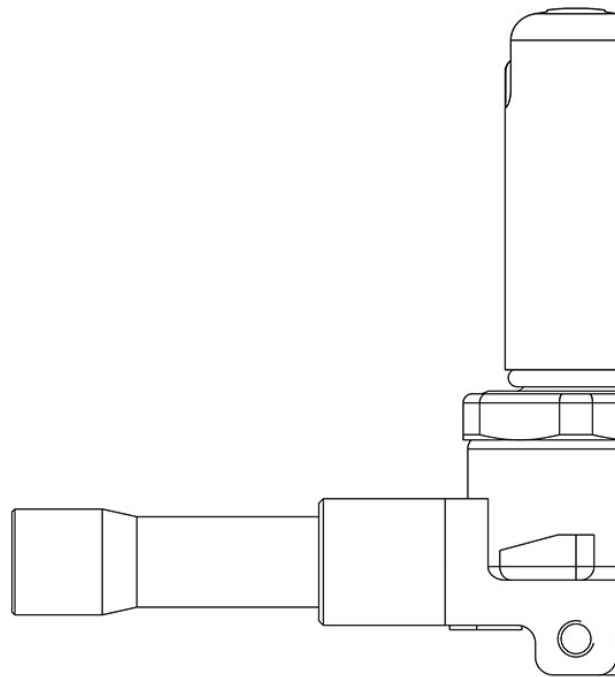

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:  
HFC (R134A, R32, R404A, R407C, R410A, R507)  
HFO (R1234YF, R1234ZE)  
HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)  
HC (R290, R600, R600A, R1270)

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC).

### Product Details

|                         |                       |
|-------------------------|-----------------------|
| Operating principle     | Direct acting         |
| Coil Type (1)           | HF2HF3HF4HM2HM3HM4CM2 |
| Connections ODS Ø [in.] | 3/8"                  |
| Connections ODS Ø [mm]  | -                     |
| Kv [m³/h]               | 0,15                  |
| PS [bar]                | 50                    |
| TS [°C] (2) min.        | -40                   |
| TS [°C] (2) max.        | +150                  |
| Package Pcs.            | 24                    |

## Notes where expressly stated

(#): for hot gas by-pass, liquid injection, oil line

(1) : coils that can be mounted on the valves

(2) : for use on the oil line TS = -10 /+70 °C