


Product Code

9150N/R69

Orifice Assemblies

07x2028
PS = 50 bar

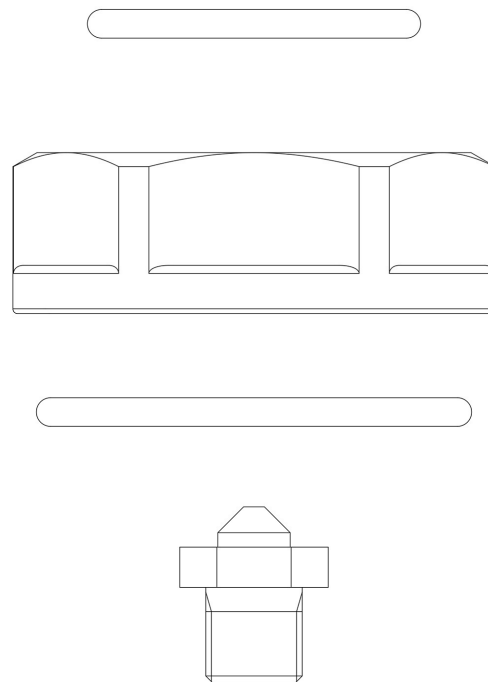

Product use

Solenoid expansion valves with the 'EX' suffix are compliant with the ESR of Directive 2014/34/EU 'ATEX'. This equipment is suitable for use on refrigeration systems located in areas classified as 'Zone 2' risk of explosion, according to the definition in Annex I of Directive 1999/92/EC.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A,

R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

These valves are only sold in the model with the ATEX certified coil (A6 suffix), with 9 nozzles assembled for an increasing output from 2 to 36 kW with R290.

Product Details

Orifice type	07
Rated capacity (1) [kW] R134a	11,26
Rated capacity (1) [kW] R32	24,98
R404A	10,51
R507	10,51
R407C	14,66
R410A	17,22
R1234ze	8,84
R1234yf	8,30
R448A	14,03

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

R449A	13,77
R450A	9,88
R452A	10,88
R452B	19,42
R454A	14,21
R454B	19,61
R454C	12,13
R513A	9,55
R515A	8,51
R515B	8,47
R290	15,17
R600	9,63
R600a	9,95
R1270	16,98
Package pcs.	180

Notes where expressly stated

(1) Rated capacities are based on:

- Evaporating temperature $T_{\text{evap}} = + 5\text{ }^{\circ}\text{C}$
- Condensing temperature $T_{\text{cond}} = + 32\text{ }^{\circ}\text{C}$
- Refrigerant liquid temperature ahead of valve $T_{\text{liq}} = + 28\text{ }^{\circ}\text{C}$